


JJS Technology Industrial Limited

JJS Technology Industrial Limited


Model Number:

BG-2002-2824-0288

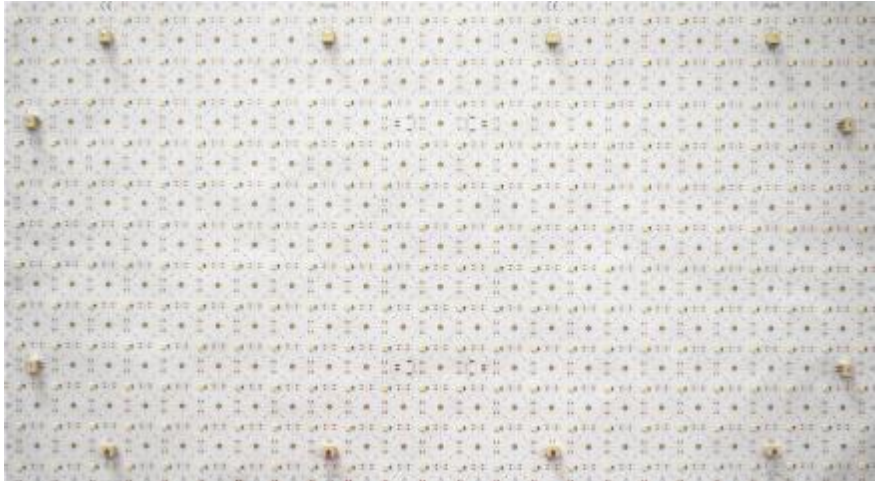

JJS Technology is committed to provide high quality LED lighting product and superior service for market.

- 1. The LED are packaged with pure gold wires and large-size
- 2. Only one Bin LED is used for each order, and keep the same Bin LED in subsequent orders to ensure the consistency of the product.
- 3. The production process adopts high-temperature, lead-free SMT technology, the solder joints are smooth and full.
- 4. Use double-layer PCB to ensure stable electrical performance.
- 5. Use original authentic 3M tape, strong and long-lasting adhesion.
- 6. A variety of installation accessories are optional, flexible and convenient to use.
- 7. Different IP grade are available: IP20,IP54.
- 8. High light transmittance, environment friendly silicone material is used for waterproof product, colorless, odorless and anti-yellowing.

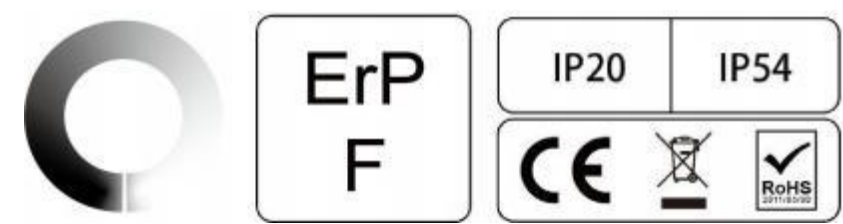

Product description

- 1. Dimensions:610*305mm
- 2. Power: 30W/m
- 3. LED type: SMD2835
- 4. LED quantity: 288LEDs/m
- 5. LED color: 1800-10000K
- 6. Cut length:1LEDs/ 25.4*25.4mm
- 7. PCB material/PCB: double layer FPC
- 8. Life time: 36000hours
- 9. IP grade: IP20,IP54

Application

- Home decoration lighting
- Light box lighting
- Decoration of entertainment places
- Other auxiliary lighting

Product picture



Application scenarios



Technical parameters


Optical parameters(white)	Electrical performance parameters	Other parameters
Luminous: 3000Lm/m CCT: 1800-10000K CRI: Ra>90 Light efficiency: 100Lm/W	Voltage: 24V Current: 1.25A/m Power: 30W/m	Storage temperature: -40~+80°C Working temperature: -25~+60°C Life time: >36000 hours Warranty: 3 years

Dimensions




Connection diagram


1. Single wire connection

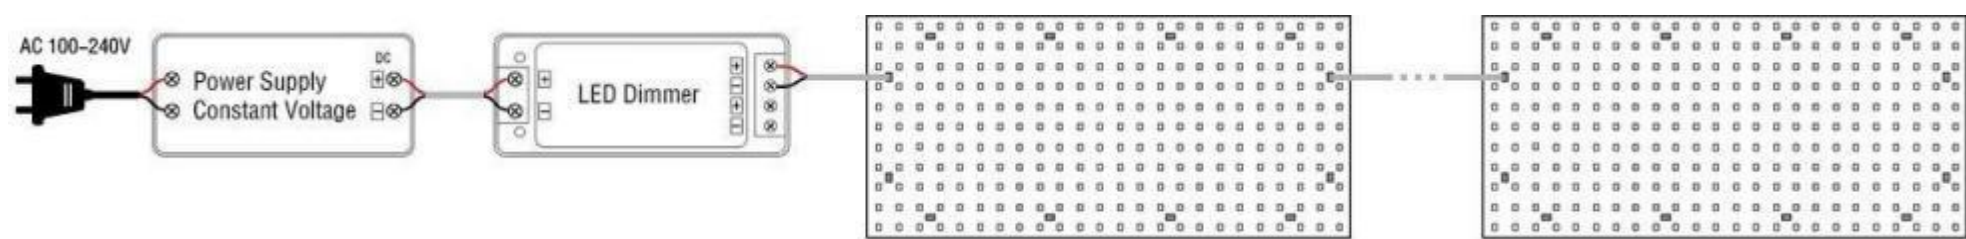

2. Double line connection

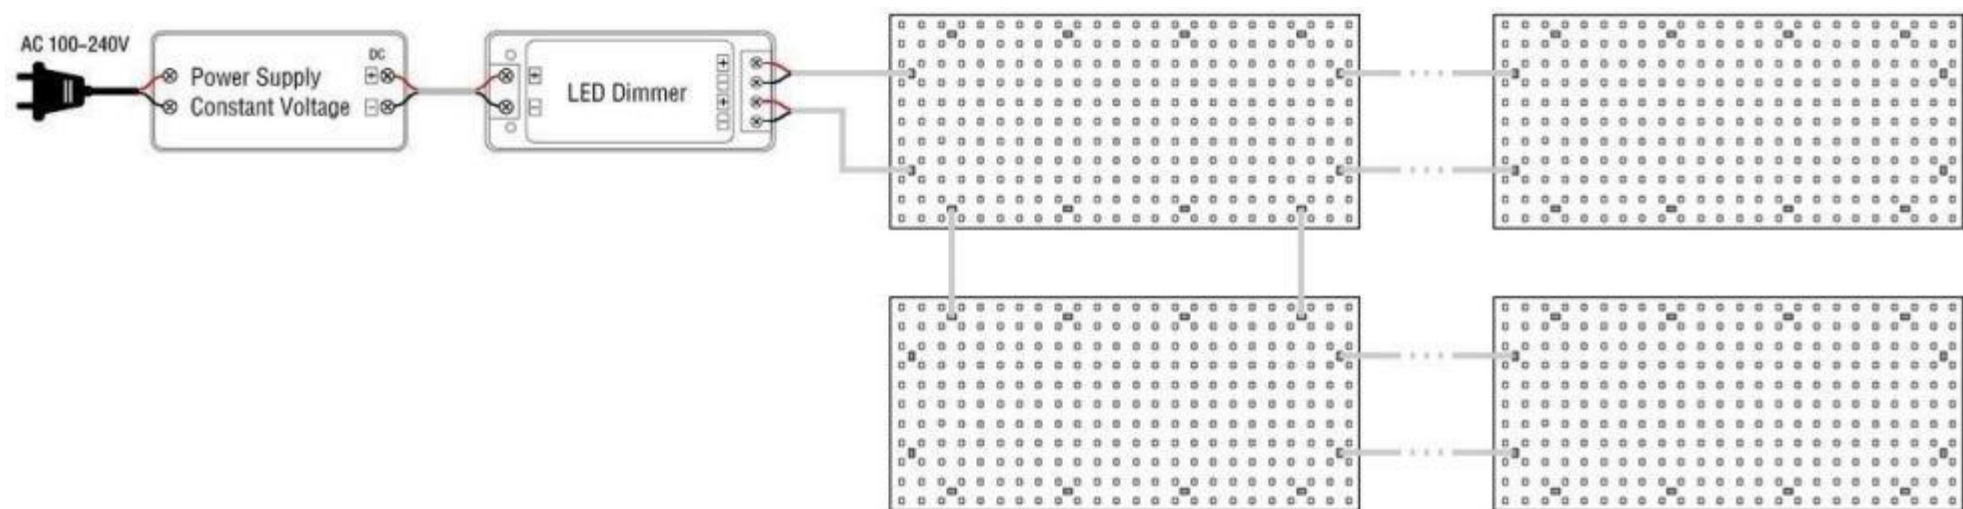

3. Amplifier connection

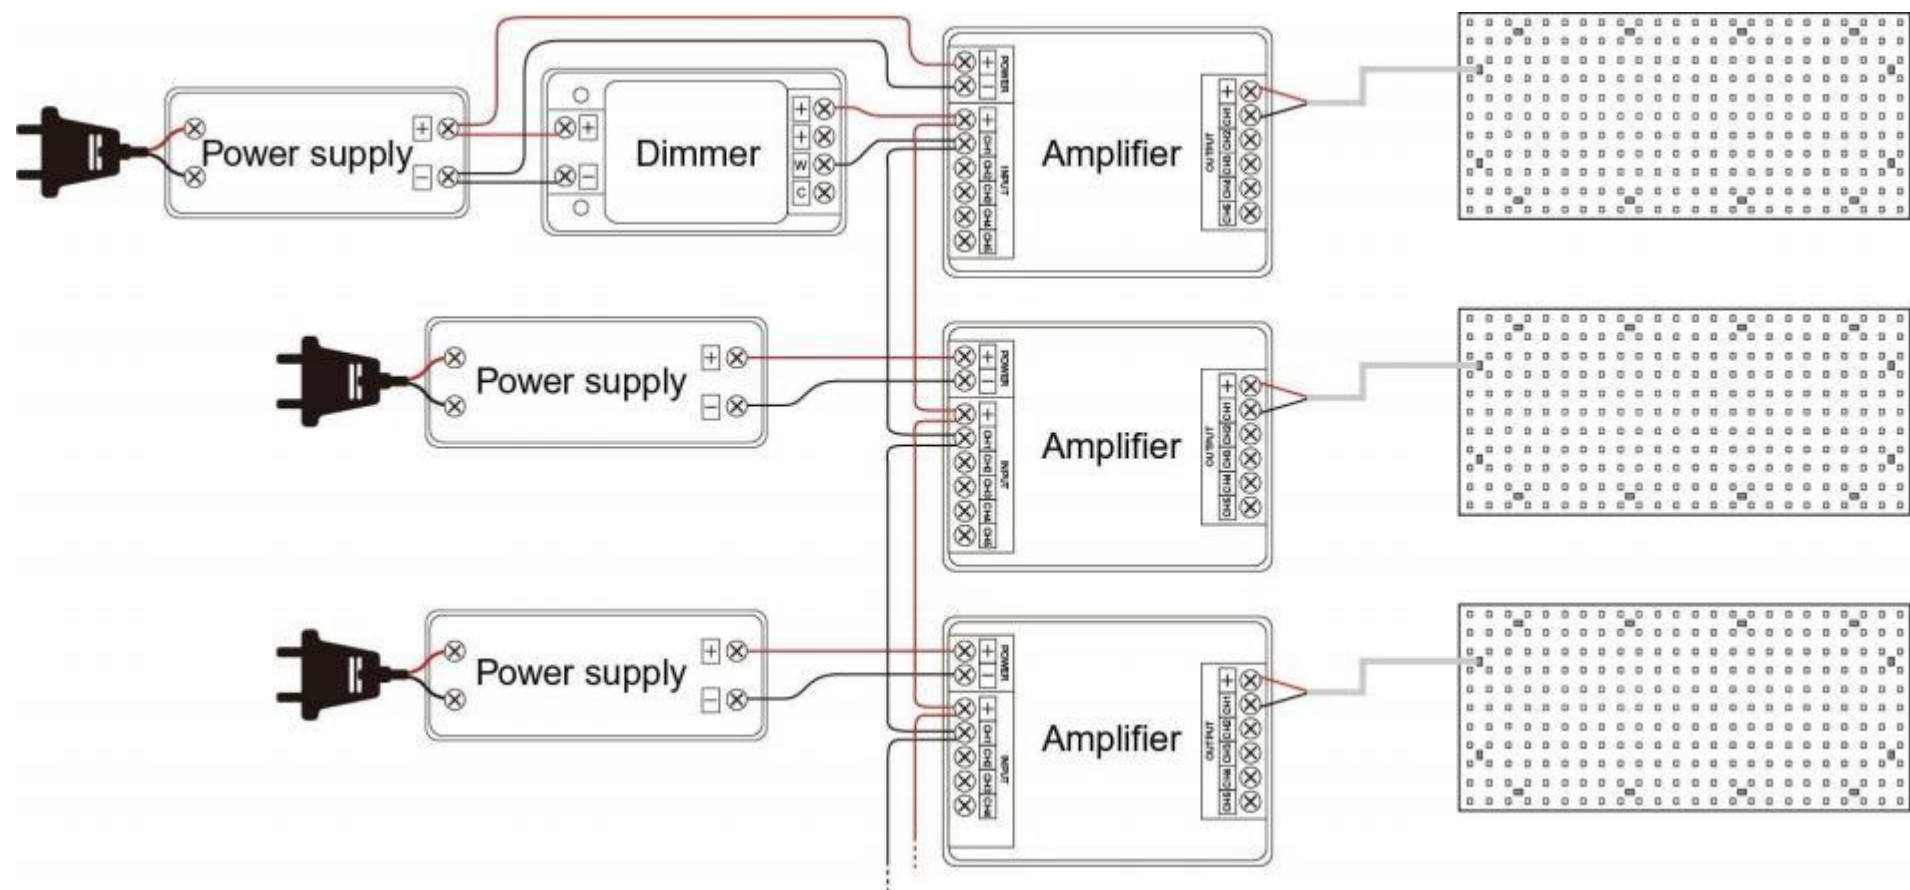

► When a controller is needed to control more LED sheet, amplifiers can be used, The maximum quantity for each unit is based on reference methods 1 and 2.

Accessories



Connection
terminal wires*2



Input power cable*1



Anti-collision
silicone particles*8



Screw*8



Screw shim*8

Packing instruction



Packing Information				
Products	Gross Weight/Roll	QTY/Carton	Packing Slze	Total Weight
IP20-Non-Waterproof	0.2KG	50 PCS	680x350x400mm	10KG

Notes

- ▶ Special length need to be customized.
- ▶ Do not place heavy products on the top of the cartons, do not step on it.
- ▶ After receiving the package, if the outer box was damaged, please check the goods before signing for receipt.