


JJS Technology Industrial Limited



JJS Technology Industrial Limited

Model Number:
BG-0296-5024-0288

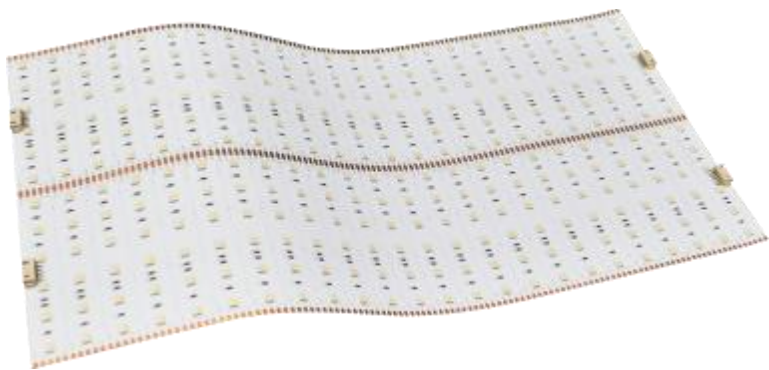

JJS Technology is committed to provide high quality LED lighting product and superior service for market.

- 1. The LED are packaged with pure gold wires and large-size chips.
- 2. Only one Bin LED is used for each order, and keep the same Bin LED in subsequent orders to ensure the consistency of the product.
- 3. The production process adopts high-temperature, lead-free SMT technology, the solder joints are smooth and full.
- 4. Use double-layer PCB to ensure stable electrical performance.
- 5. Use original authentic 3M tape, strong and long-lasting adhesion.
- 6. A variety of installation accessories are optional, flexible and convenient to use.
- 7. Different IP grade are available: IP20, IP54.
- 8. High light transmittance, environment friendly silicone material is used for waterproof product, colorless, odorless and anti-yellowing.

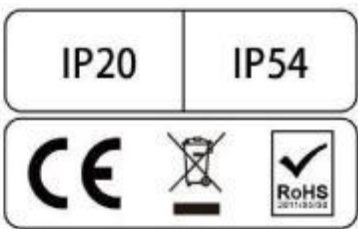


Product description

- 1. Dimensions: 490*245mm
- 2. Power: 48W/PCS
- 3. LED type: SMD5050
- 4. LED quantity: 288LEDs/PCS
- 5. LED color: RGBW
- 6. Cut length: 20.4mm
- 7. PCB material/PCB: double layer FPC
- 8. Life time: 36000hours
- 9. IP grade: IP20, IP54

Application

- Home decoration lighting
- Light box lighting stage lighting
- Decoration of entertainment places
- Other auxiliary lighting

Product picture

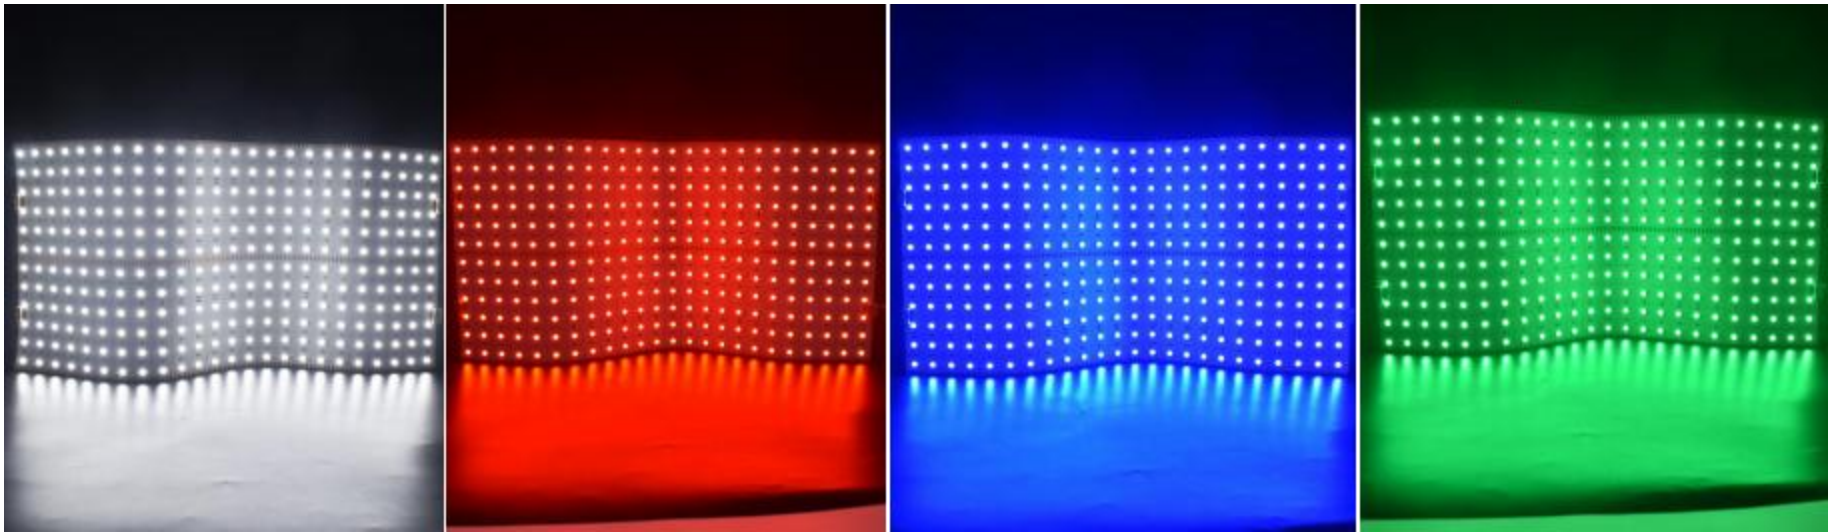

Application scenarios




Technical parameters

Optical parameters(white)	Electrical performance parameters	Other parameters
Luminous: W=2400Lm/PCS CCT: RGBW CRI: W: >80 Beam angle: 120° Light efficiency: 100Lm/W	Voltage: DC24V Current: 2A Power: 48W/PCS	Storage temperature: -20~+60°C Working temperature: -20~+60°C Life time: >36000 hours Warranty: 3 years


Dimensions




Connection diagram

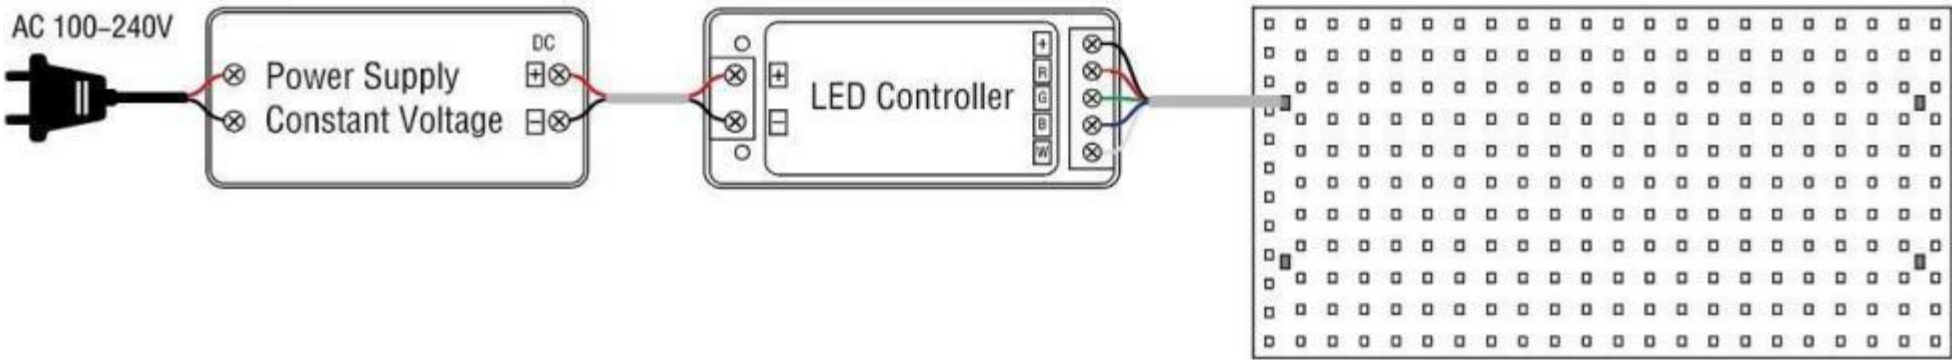


1. Single wire connection

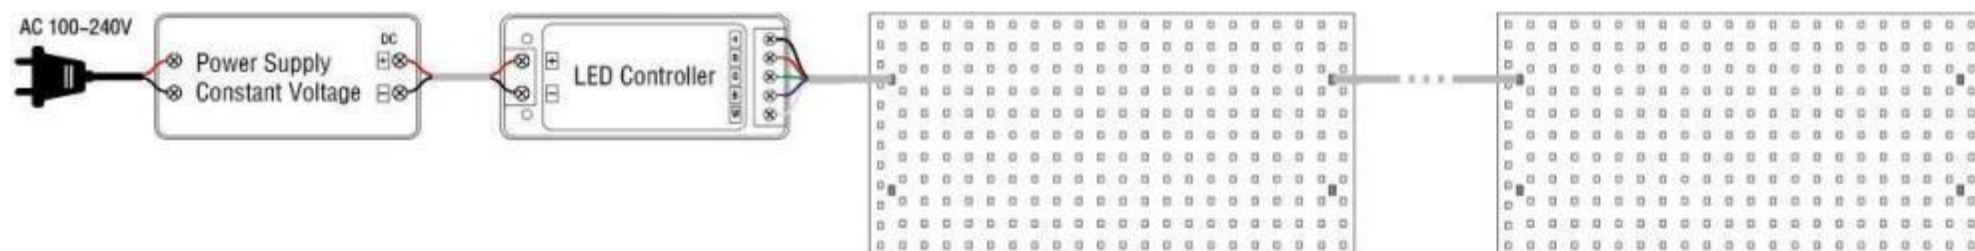

2. Double line connection

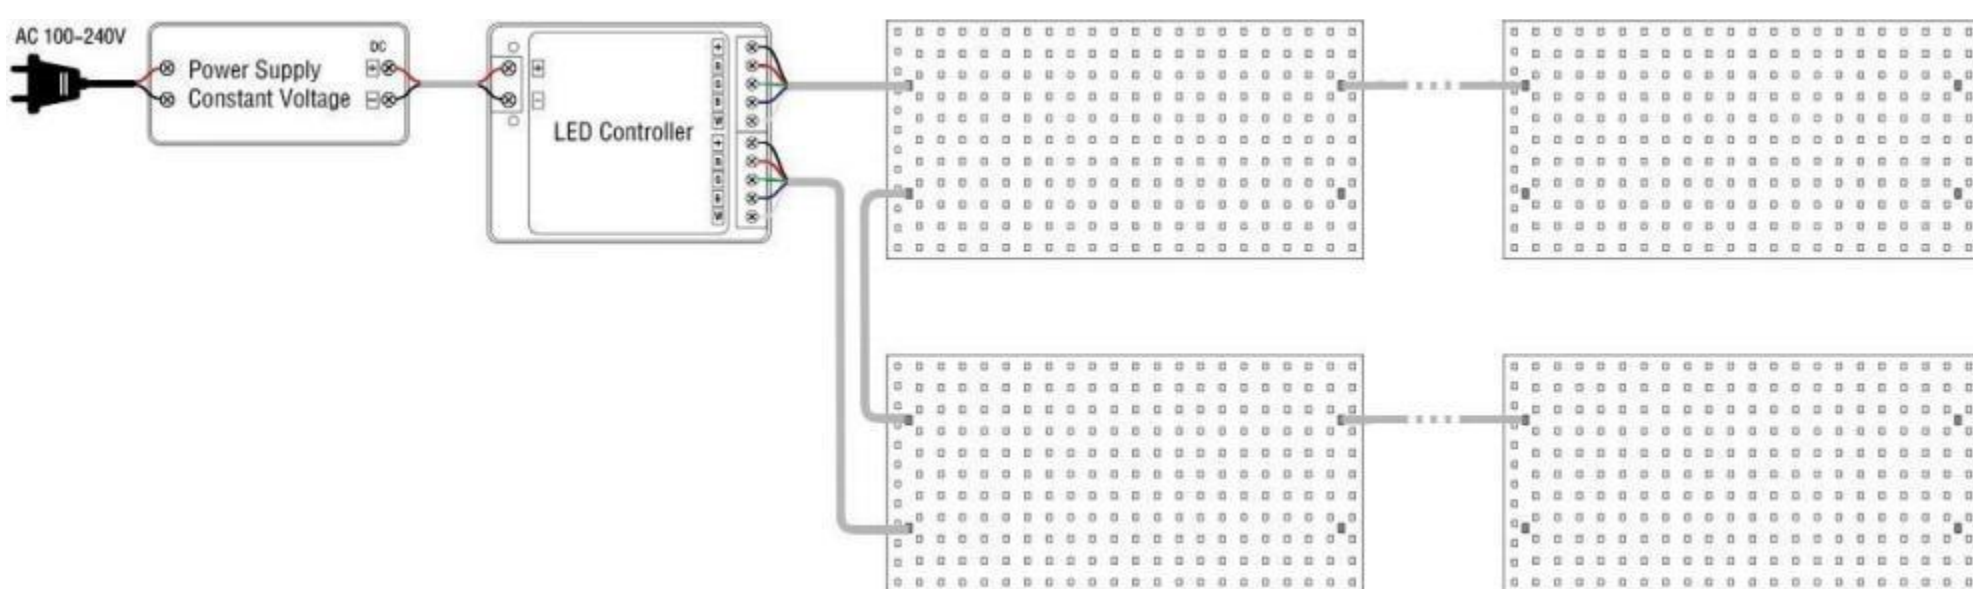

3. Amplifier connection

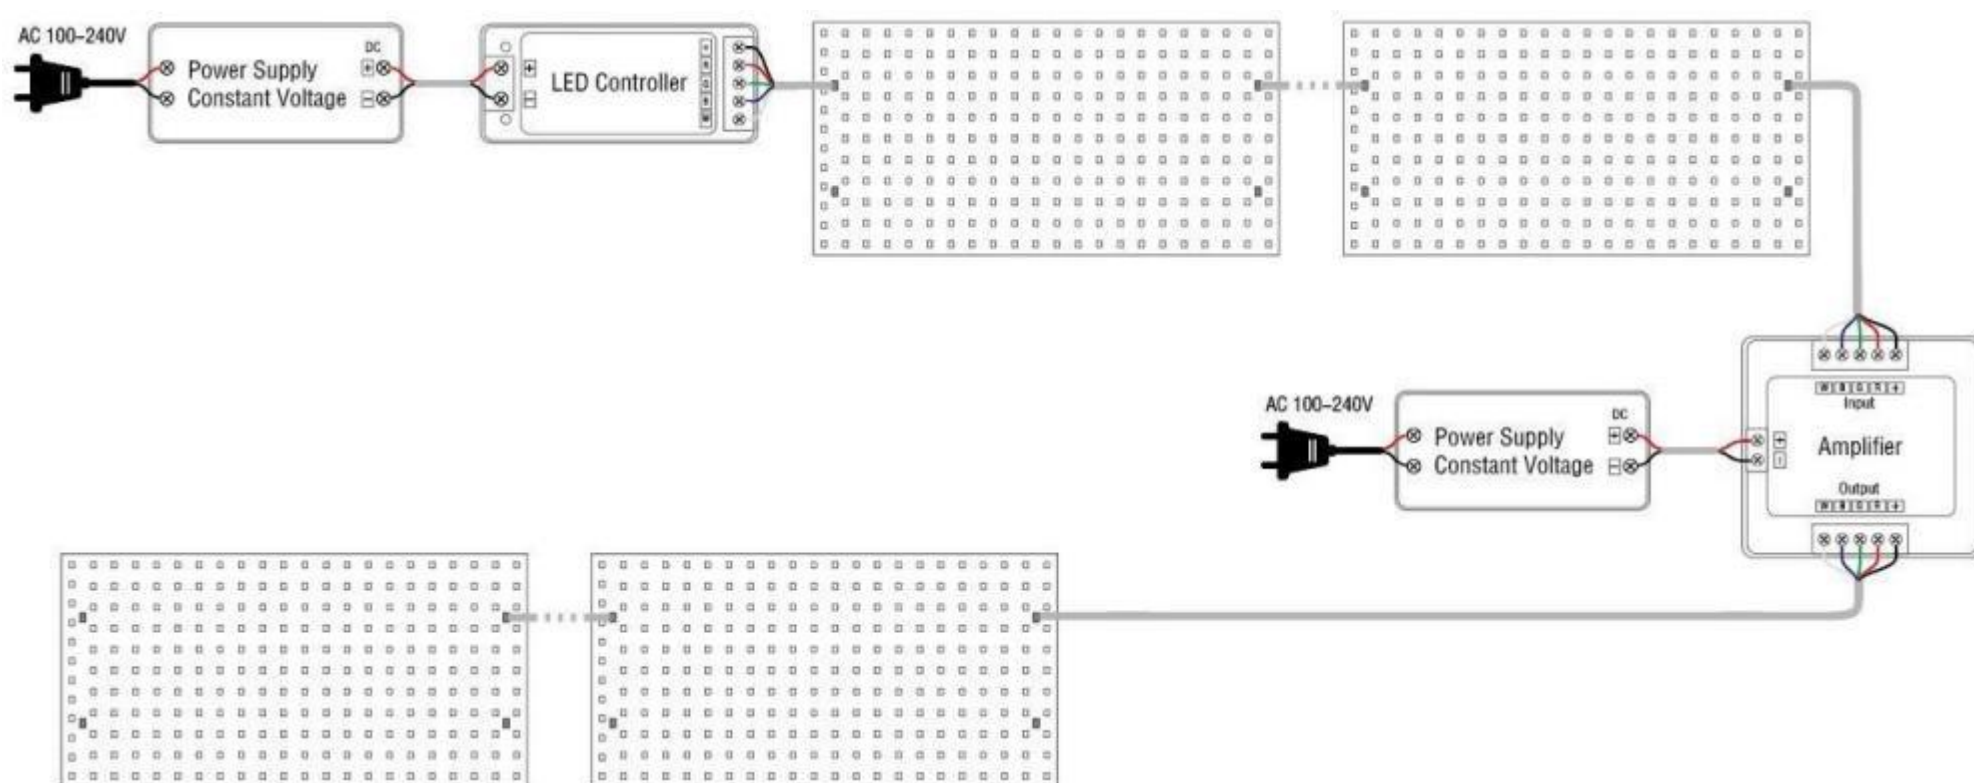


- When a controller is needed to control more LED sheet, amplifiers can be used, The maximum quantity for each unit is based on reference methods 1 and 2.

Accessories



Connection
terminal wires*2
连接端子线*2

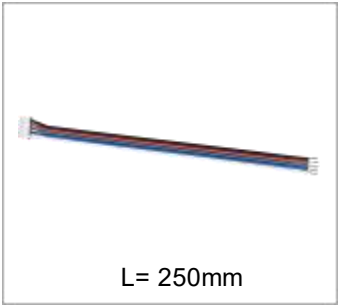

Input power cable*1
输入供电线*1



Anti-collision
silicone particles*8
防撞硅胶粒*8



Screw*8
螺丝*8



Screw shim*8
螺丝垫片*8

Packing instruction



Packing Information				
Products	Gross Weight/Roll	QTY/Carton	Packing Size	Total Weight
IP20-Non-Waterproof	0.2KG	50 PCS	530x290x400mm	10KG

Notes

- ▶ Special length need to be customized.
- ▶ Do not place heavy products on the top of the cartons, do not step on it.
- ▶ After receiving the package, if the outer box was damaged, please check the goods before signing for receipt.